


Total length: S11-L=3289 / S12-L=3539 / S13=4299

Total length = Rail length + 209 mm

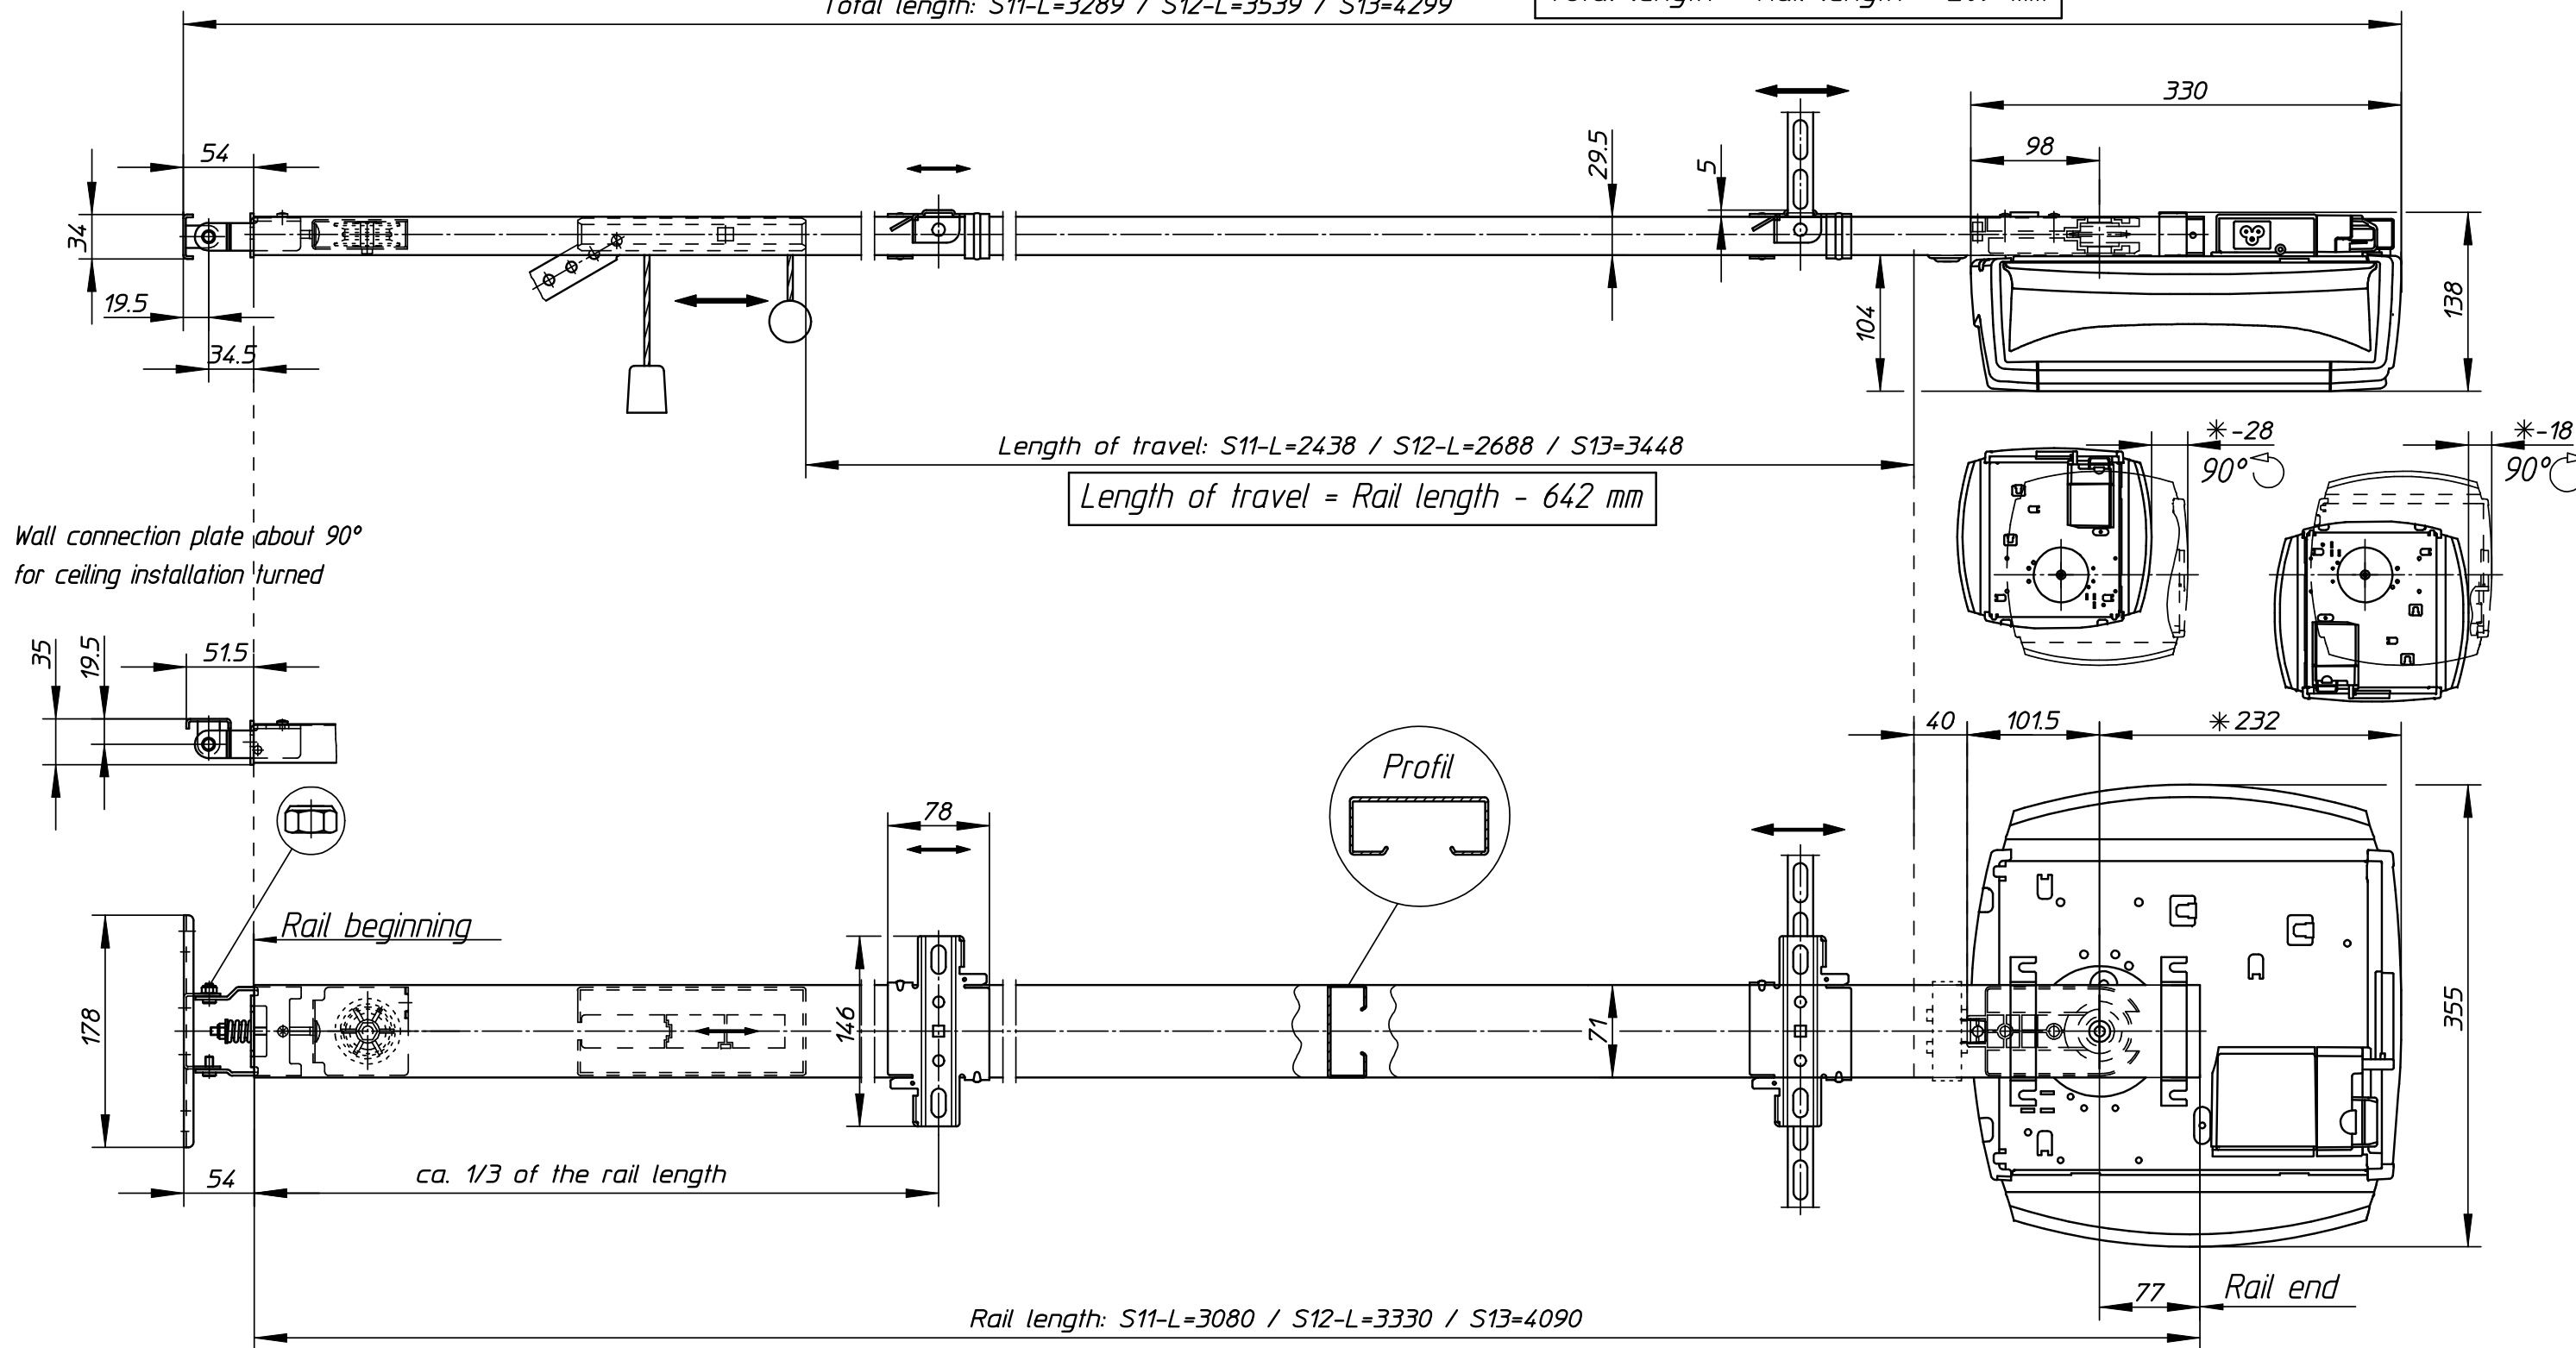

Rail length S 11-L = 3080 for up-and-over doors up to 2500 high and sectional doors up to 2250 high (N-fitting) and 2125 high (L-/Z-fitting)  
 Rail length S 12-L = 3330 for up-and-over doors up to 2750 high and sectional doors up to 2500 high (N-fitting) and 2375 high (L-/Z-fitting)  
 Rail length S 13 = 4090 for up-and-over doors up 3500 high and sectional doors up to 3250 high (N-fitting) and 3125 high (L-/Z-fitting)

Calculation of extra rail length  
 Up-and-over door: rail length = door high + 580  
 Sectional doors (N-fitting): rail length = door high + 830  
 Sectional doors (L-/Z-fitting): rail length = door high + 955

Sectional door fitting N = Doors with normal recession curve  
 Sectional door fitting L = Doors with low headroom fitting  
 Sectional door fitting Z = Doors with tension springs at the side

All dimensions in mm

Subject to modification!

Stück	Benennung			Teil	Werkstoff	DIN/Zchnng.Nr.	Bemerkungen
Zul. Abw. n. DIN ISO 2768 mittel	2013	Datum	Name	Marantec Antriebs- und Steuerungstechnik GmbH & Co. KG Remser Brook 11 * 33428 Marienfeld Telefon (05247) 705-0 Telefax (05247) 705-292			
	Gezeichnet	25.06.	Sunderkötter	Geprüft			
	Änderungen			Maßstab	Zeichnungs Nr.:		
Index	Datum	Name	ohne	Comfort 360, 370, 380			M/16969
a	02.07.13	Sun.					
b							
c							
d							
e			Me10/WS1/Sun/Comf_360-370-380-Prinz_GB			Ersatz für:	
							Ersetzt durch:

